


**Medium-duty overhead holder and stop
for interior doors,
single acting**

**Now available
US32D & US32**

**4400 SERIES
SURFACE MOUNTED**

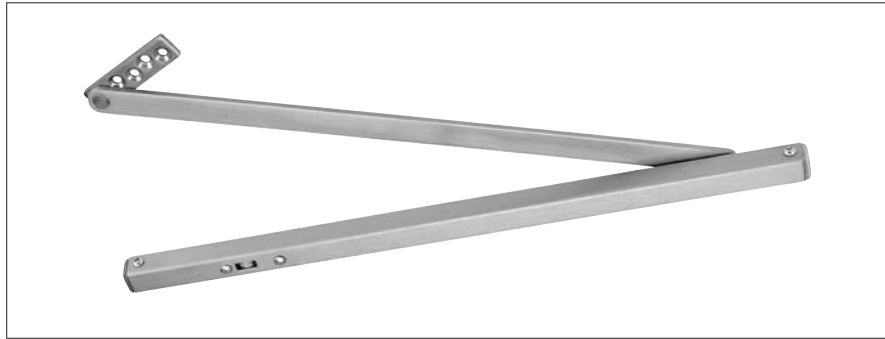

STANDARD FEATURES

- For All Stainless Steel Components - Prefix N
- Field adaptable functions
- Non-handed/reversible
- Automatic hold-open and release by push and pull on door
- Hold-open can be disengaged to act as stop only
- Friction holder can be adjusted easily on site at any position and held under adjustable pressure
- Maximum opening 110°, minimum door thickness 1 3/8"
- Wood, machine screws included
- Available in all BHMA plated and sprayed finishes

**All Stops
Warnock Hersey
listed**

**WHEN ORDERING,
please list:**

Model number

Door closer number or other hardware

Mounting means of the door and butt size

Hold-open or dead-stop degree

Door opening and thickness

Finish

SPECIFICATIONS:

Stop only function to be Warnock Hersey listed as manufactured by ABH.

*Material:
Channel-stainless steel/steel/brass 3/4" deep, 3/4" wide and .050 thick; arm-steel/brass/stainless steel 3/4" wide and 3/16" thick; bronze jamb bracket 3/4" wide, 3/16" thick and 2 7/8" long; hold open mechanism with sliding block will engage or release door by push or pull.
Hold-open mechanism can be disengaged to function as stop only.*

DOOR FRAME OPENING		HOLDER NUMBER		
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD- OPEN	STOP	FRICTION
18" - 23 15/16"	22" - 27 7/16"	4411	4421	4431
24" - 29 15/16"	27 1/2" - 33 7/16"	4412	4422	4432
30" - 35 15/16"	33 1/2"-38 15/16"	4413	4423	4433
36" - 48"	39" - 48"	4414	4424	4434
BHMA NUMBER		C05511	C05541	C05531
FED. SPEC TYPE		1166	1166A	1164

Contact ABH for special templating or other door opening
Average weight/unit 1 3/4 lbs.

www.abhmfg.com
E-mail: abhinfo@abhmfg.com
Architectural Builders Hardware Mfg., Inc.
1222 Ardmore Ave., Itasca, IL 60143
630.875.9900; FAX 800.9FAXABH (932.9224)

© 2005 ABH Mfg., Inc.
Printed in USA 02/05

