


Heavy-duty overhead door holder and stop for exterior, vestibule or interior doors, single acting

**Now available
US32D & US32**

**9000 SERIES
SURFACE MOUNTED**

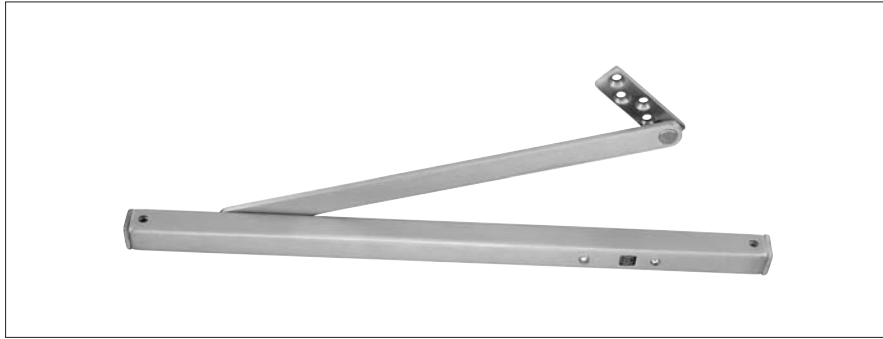

**WHEN ORDERING,
please list:**

Model number

Door closer number or other hardware

Mounting means of the door and butt size

Hold-open or dead-stop degree

Door opening and thickness

Finish

STANDARD FEATURES

- For all Stainless Steel Components - Prefix N
- Non-handed/reversible
- Single point hold-open in increments of 5° from 85° to 110°
- Hold-open knob can be disengaged to act as a stop only
- 5° to 7° shock compression following hold-open point
- Steel shock absorbing spring
- Die cast end block and shock block
- Maximum opening 110°, minimum door thickness 1 3/4"
- Wood, machine screws and sex bolts included
- Available in all BHMA plated and sprayed finishes

**All Stops
Warnock Hersey
listed**

SPECIFY ANGLE JAMB BRACKET 90541 FOR HINGE SIDE OR FLUSH TRANSOM MOUNTING

SPECIFICATIONS:

Stop only function to be Warnock Hersey listed as manufactured by ABH.

Material:
bronze/steel/stainless steel;
channel 3/32" thick and 1 1/8" depth;
arm 1/4" thick and 1" wide;
jamb bracket 1/4" thick and 1" wide;
sliding block shall have easy access for tension adjustment.

STAINLESS STEEL SPECIFICATIONS:
All parts stainless steel as manufactured by ABH.

DOOR FRAME OPENING		HOLDER NUMBER		
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD-OPEN	STOP	FRICTION
28" - 29 15/16"	30" - 33 15/16"	9011	9021	9031
30" - 31 15/16"	34" - 35 15/16"	9012	9022	9032
32" - 35 15/16"	36" - 38 15/16"	9013	9023	9033
36" - 39 15/16"	39" - 40 15/16"	9014	9024	9034
40" - 41 15/16"	41" - 44 15/16"	9015	9025	9035
42" - 43 15/16"	45" - 46 15/16"	9016	9026	9036
44" + Greater	47" + Greater	9017	9027	9037
BHMA NUMBER		C02511	C02541	C02531
FED. SPEC TYPE		1161	1161A	-

Contact ABH for special templating or other door opening
Average weight/unit 6 lbs.

www.abhmfg.com
E-mail: abhinfo@abhmfg.com
Architectural Builders Hardware Mfg., Inc.
1222 Ardmore Ave., Itasca, IL 60143
630.875.9900; FAX 800.9FAXABH (932.9224)

© 2005 ABH Mfg., Inc.
Printed in USA 02/05

