



## Built-in Showers with Concealed Supplies

### Specifications

#### Materials

All exposed materials are stainless steel or chrome-plated brass. Valve bodies are cast brass.

#### Standard Equipment

##### In-Wall Shower Valve as Selected

For more detailed information refer to tech data for specific valve.

#### Supply Inlets

Female supply inlets are 1/2".

#### Optional Equipment

##### Showerhead – 1/2" NPT


Institutional or deluxe type chrome-plated showerhead with bent arm and flange or wall arm.

##### Flow Control

A 2.0 GPM (7.6 LPM) flow control is standard. Actual flow may vary but will not exceed 2.5 GPM (9.5 LPM) max..

##### Tub Spout

Diverter type spout with 1/2" inlet.

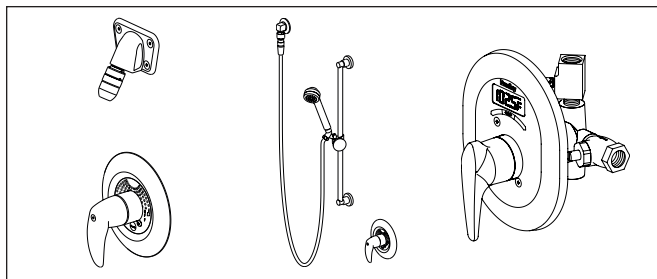

#### Hand-Held Shower Spray

Constructed with a 60" stainless steel flexible hose and post style mounting bracket for wall mount or slide bar. Elevated in-line back flow preventer with or without quick disconnect for flexible hose.

#### Diverter Valve

Lever handle operation for easy transfer of water flow between fixed and hand held spray.

Model	Description
<input type="checkbox"/> 1C	Built-In Showers with Concealed Supplies

### Optional Selections

#### Valves (select one):

##### Hot/tempered and cold supplies

- EF Equa Flo Pressure Balancing Valve
- EFT1 Equa Flo Pressure Balancing Valve with Temperature Display
- C5 Equa-Flo C5 Pressure-Balancing Valve
- HD HDT1 Equa Flo HD Pressure Balancing
- HDT1 Equa Flo HD Pressure Balancing Valve with Temperature Display
- TMV TMVT1 Thermostatic Mixing Valve
- TMVT1 Thermostatic Mixing Valve with Temperature Display
- HC Hot and Cold Compression Valve

##### Single tempered/cold supply

- AZ\* Infrared Metering Valve
- AST Air Metering Valve
- PM Presto 50B Metering Valve
- SV Single Compression Valve
- SVL Single Compression Valve with Lever Handle
- TT\* TouchTime® Metering Valve — 1 minute
- TT3\* TouchTime® Metering Valve — 3 minutes

#### Showerhead (select one):

##### Bent Arm and Flange

- S1 Standard Institutional Showerhead
- D1 Deluxe Showerhead w/ Ball Joint
- B1 Brass Showerhead w/ Ball Joint
- E1 Economy Soft Flow Showerhead
- J1 Multi-Jet Chrome-Plated Brass Showerhead

##### Wall Arm

- S Standard Institutional Showerhead
- SF Deluxe Showerhead w/ Ball Joint
- BS Brass Showerhead w/ Ball Joint
- ES Economy Soft Flow Showerhead
- SX Severe Service Showerhead

#### Showerhead Options (select one): (not available with SX, E1, J1, B1, BS or ES)

- AKV Allen Key Volume Control
- LBJ Lockable Ball Joint
- THV T-Handle Volume Control

#### Hand Shower Variations (select one):

- B24 With 60" Flexible Hose, 24" Metal Slide Bar and Vacuum Breaker
- E24 With 60" Flexible Hose, 22" Economy Slide Bar and Vacuum Breaker
- SB With 60" Flexible Hose, 24" Metal Slide Bar, Vacuum Breaker and Quick Disconnect
- HW With 60" Flexible Hose, Wall Hooks and Vacuum Breaker
- HS With 60" Flexible Hose, Wall Hooks, Vacuum Breaker and Quick Disconnect
- A24 With 60" flexible hose, 24" ADA Grab Bar and Vacuum Breaker
- A36 With 60" flexible hose, 36" ADA Grab Bar and Vacuum Breaker

#### Optional Flow Control: (not available with D1, B1, J1, SF or BS)

- G 1.5 GPM (5.7 LPM) Flow Control (showerhead and hand shower)

#### Diverter Valve:

- DV In-Wall Diverter Valve

#### Tub Spout (select one):

- TS Tub Spout — threaded
- DJ Tub Spout — slip joint

#### Supply Stops (select one): (included with EF, HD and TMV valves)

- ST Stops in Supply for Valves

#### Miscellaneous (select one):

- AP Anchor Plate for Showerhead
- SD Wall Mounted Soap Dish
- BP Back Plate for Showerhead
- RSD Recessed Soap Dish

\*AZ, TT, and TT3 valves require optional 24V Class 2 transformers, available as a separate item from Bradley