
McKinney®
ASSA ABLOY

TEMPLATE K-MCK-12HD-83-09


Effective date: September 10, 2009
Supercedes: All Previous


TEMPLATE K-MCK-12HD-83-09

83" K-MCK-12HD
TEMPLATE FULL MORTISE CONTINUOUS GEARED ALUMINUM HINGE FOR KAWNEER

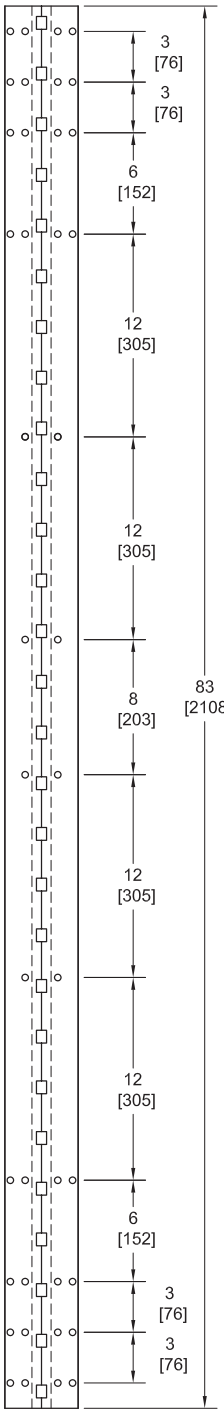


Fire Rated
Classified & Listed to meet the requirements of Standards UL10B, UL10C, UBC7-2, Part I & BS476
POSITIVE PRESSURE

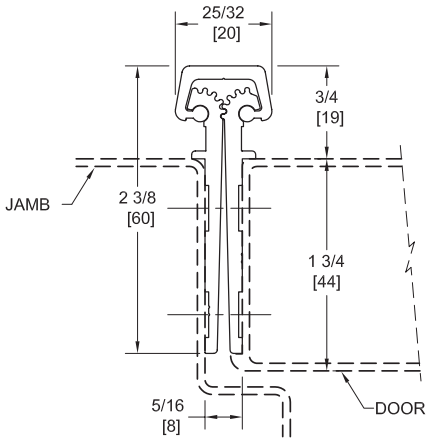

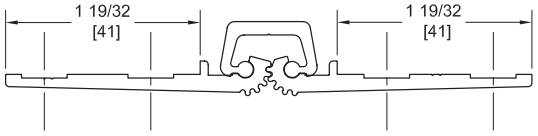

DO NOT SCALE

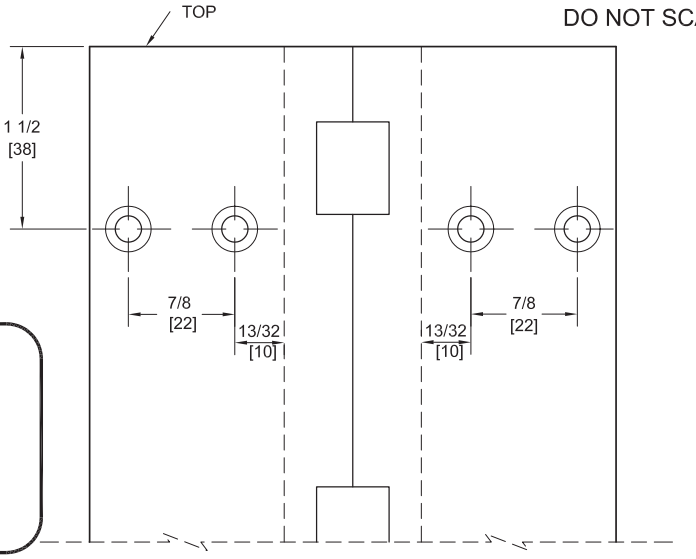

* * CAUTION * *
Due To Frame Installation Variations, Pre-drilling For Fasteners Is Not Recommended

McKINNEY Template Full Mortise Continuous Geared Aluminum Hinges 83" K-MCK-12HD are made to conform to this drawing.
McKINNEY 83" K-MCK-12HD hinges can be supplied with Electric Functions – See Electrical Application Section.
Machine Screw Size – No. 12-24 x 7/16 FHUC Thread-forming.
McKINNEY Continuous Geared Aluminum Hinges are Listed for fire applications up to 90 minutes without special preparation; for 3 hour openings using hollow metal doors and hollow metal frames on Masonry/Drywall, Fire Pins (supplied separately) must be used.

Continued...

McKINNEY Products Company • 225 Episcopal Road • Berlin, CT 06037 • PHONE: 800-346-7707 • FAX: 800-541-1073


Copyright © 2009, McKinney Products Company, an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of McKinney Products Company is prohibited.


Effective date: September 10, 2009
Supercedes: All Previous

McKinney®
ASSA ABLOY

83" K-MCK-12HD
TEMPLATE FULL MORTISE CONTINUOUS GEARED ALUMINUM HINGE FOR KAWNEER

Fire Pin Application

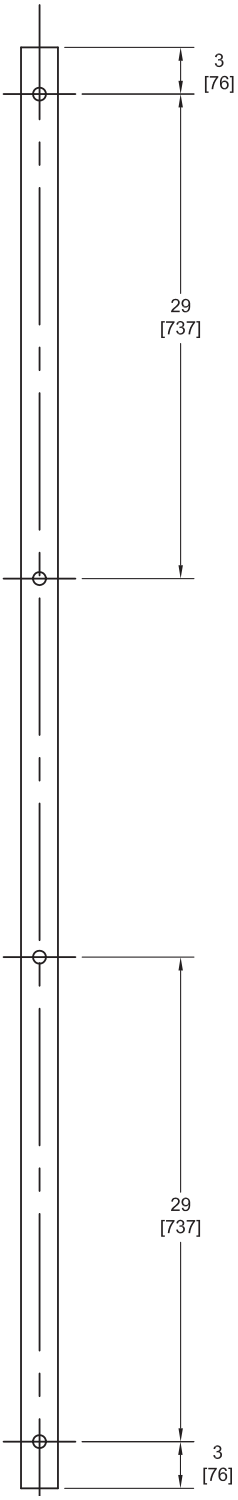

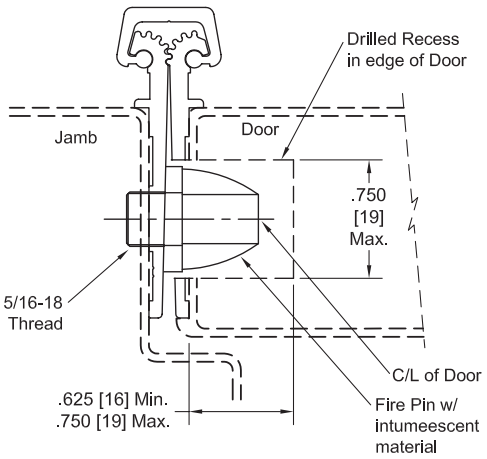

Concealed Circuit (CC) Application

Refer to Template 606

Magnetic Monitor (MM) Application

Refer to Template 606

Copyright © 2009, McKinney Products Company, an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of McKinney Products Company is prohibited.