



ASSA ABLOY

ASTRAGAL AND MEETING STILES


Applies to the following products:

355_V, 355_P

Testing/Ratings:



Tools Required:




Installation Instructions:

For use with bevel edge outswing or double-egress doors.

1. Measure, mark, and trim astragal to full length of door, leaving insert slightly longer than the metal at each end.

NOTE: For best seal, insert should touch header at top and threshold (or floor) at bottom.

2. Place astragal on active door (see figure below).
3. Secure in place with supplied screws.

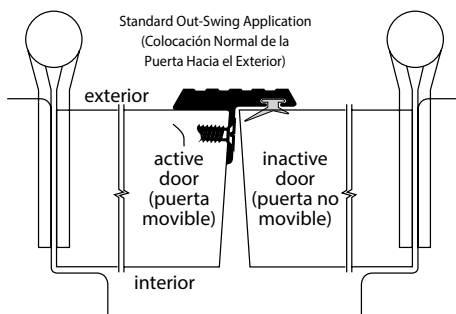

www.pemko.com

© 2013 Pemko Manufacturing Co.
AM2_WEBINS
Rev 3 - 11.21.13