

# Architectural Door Accessories

**ASSA ABLOY**

## Pemko Commercial Threshold


The global leader in  
door opening solutions

Applies to the following products:

**2001\_T, 177\_P, 1855\_P, 177\_V, 1855\_V, 181\_P,  
185\_P, 181\_V, 185\_V**

### Installation Instructions:

1. Carefully cope to fit within the frame opening making sure seal will make contact with door face.
2. Trim seal 1/16" longer than threshold at each end. Use a sealant or compound at all edges and joints.
3. Fasten with screws provided.

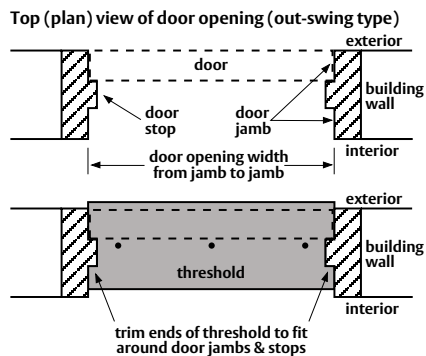


### Testing/Ratings:

Gasketing material for fire doors intended for application to listed steel frames and/or classified steel covered composite type, and hollow metal type fire doors rated up to 3 hours; wood and plastic covered composite type fire doors rated up to 1-1/2 hours; and wood core type fire doors rated up to 20 minutes. (Thresholds may or may not contain gasketing material).



### Tools Required:

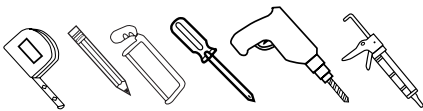

[www.pemko.com](http://www.pemko.com)

MEMPHIS, TN USA P: 800 824-3018 F: 800 243-3656  
VENTURA, CA USA P: 800 283-9988 F: 800 283-4050  
VANCOUVER, BC CA P: 877 535-7888 F: 877 535-7444  
TORONTO, ON CA P: 877 535-7888 F: 877 535-7444

Copyright © 2017 Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.  
Reproduction in whole or in part without the express written permission of Pemko Manufacturing Company is prohibited.

CT12\_WEBINS  
Rev 3 - 01.26.17  
Page 1 of 1