


SUBMITTAL SHEET

WALLS & CEILINGS

FRONT ELEVATION

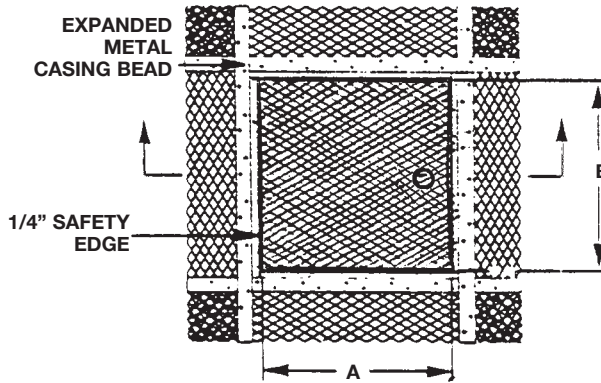

SPECIFICATIONS:

Door: 14 ga. steel. Door is recessed 1" and lined with expanded metal lath

Trim: 16 ga. steel with 24 ga. galvanized plaster bead and expanded metal lath

Finish: White baked enamel


Latches: Flush, stainless steel cam latch

Hinge: Continuous stainless steel hinge opens 180°

OPTIONS (at additional cost)

- Key-operated medium barrel cylinder lock
- Weather resistive neoprene gasket all 4 sides (Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.)
- Special sizes available
-

SECTION DETAIL

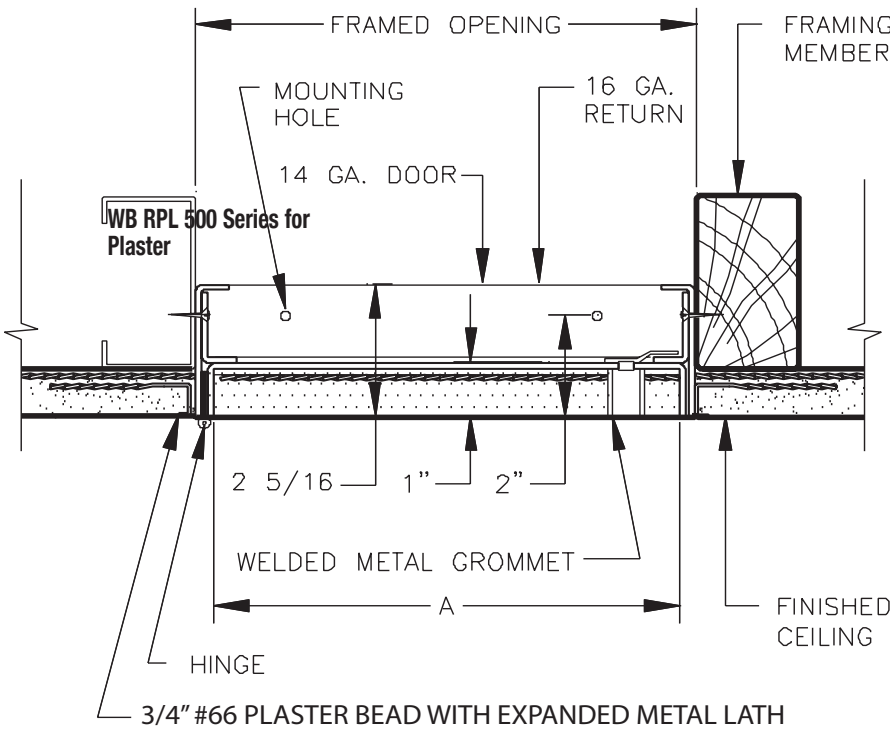

✓	Item No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
	AP 510	12 x 12	12 1/4 x 12 1/4	3	10
	AP 510	18 x 18	18 1/4 x 18 1/4	3	15
	AP 510	24 x 24	24 1/4 x 24 1/4	3	28
	AP 510	24 x 36	24 1/4 x 36 1/4	3	35

A precision door that provides a virtually concealed installation, keeping acoustical surfaces intact while contributing to sound control and better appearance. Door panels are recessed to receive plaster up to 1" thick. Plaster covering the door finishes flush with the surrounding field, leaving only the narrow frame edges exposed.

Project: _____ Date: _____
 Contractor: _____ Architect: _____
 Sizes: _____ Quantity: _____ App Initials: _____

Corp Off: 1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • Fax: 1-800-822-5001 www.wbdoors.com

RELATED PRODUCTS

WB DW 400 Series for Drywall



WB RPL 500 Series for Plaster



See us on



Like us on



facebook.com/wbdoors