


SUBMITTAL SHEET



304 stainless steel #4 satin finish, option

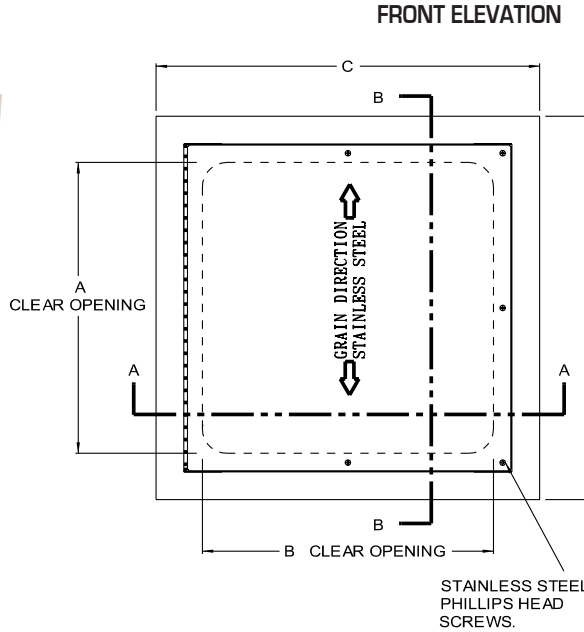

SPECIFICATIONS:

Door & Trim: 16 ga. steel

Finish: 5 stage iron phosphate with prime coat of white alkyd baking enamel

Latch: Stainless Steel phillips head screws standard

Hinge: Continuous exposed stainless steel piano hinge

Air infiltration: less than 0.01 cfm/sq foot- ASTM E 283

Water Penetration: no leakage at 15.05 psf-ASTM E



Gasket: Continuous Bulb trim Gasket

OPTIONS (at additional cost)

- Type 304 stainless steel with a #4 satin finish
- Stainless Steel allen head screws
- Stainless Steel philips head screws

✓	Item No.	Door Size W x H	Wall Opening W x H	Ship Wt. Lbs.
	ADWT	12 x 12	12 3/8 x 12 3/8	8
	ADWT	18 x 18	18 3/8 x 18 3/8	15
	ADWT	24 x 24	24 3/8 x 24 3/8	22
	ADWT	30 x 30	30 3/8 x 30 3/8	32
	ADWT	30 x 48	30 3/8 x 48 3/8	44

SECTION DETAIL

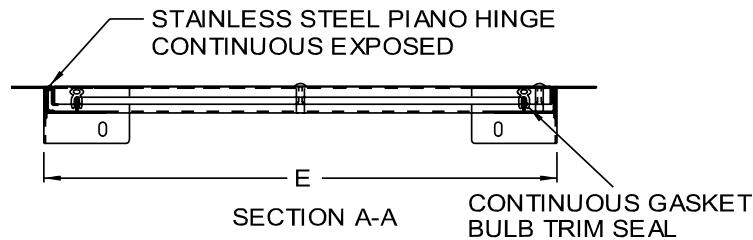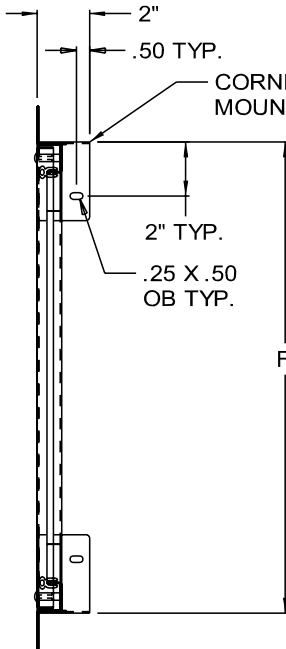

The WB ADWT is a flush access door that has been tested for air infiltration and water penetration. The Door and frame are fully welded and gasketed. This access door is ideal for use in laboratories, clean rooms, operating rooms, etc. where an airtight/watertight seal is required.

Project: _____ Date: _____
 Contractor: _____ Architect: _____
 Sizes: _____ Quantity: _____ App Initials: _____

Corp Off: 1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • Fax: 1-800-822-5001 www.wbdoors.com



Family Owned & Operated
Since 1990
Selling only through distribution

See us on



Like us on



facebook.com/wbdoors