


1000 SERIES CONCEALED HOLDERS & STOPS

REVERSIBLE

FOR SINGLE OR DOUBLE ACTING DOORS

NON - HANDED

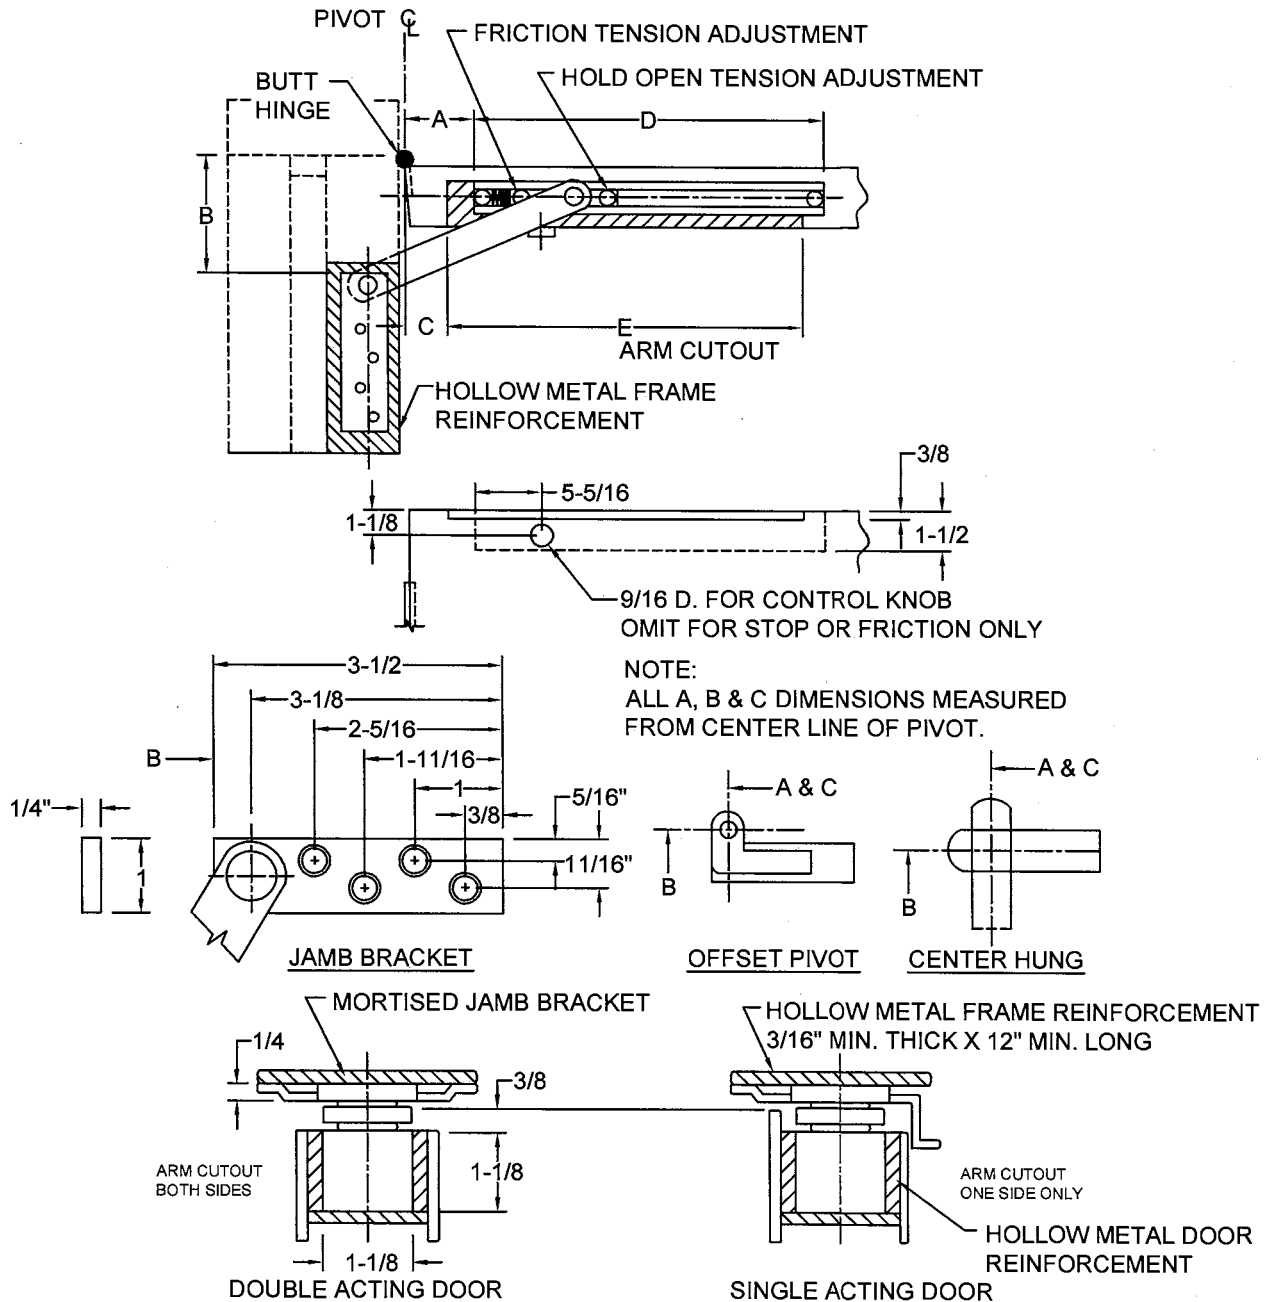

NOTE: ALL A, B & C DIMENSIONS MEASURED FROM ϕ OF PIVOT.

SCREW DETAIL			
	QTY	WOOD	METAL
JAMB	4	No. 14 X 1- $\frac{1}{2}$ " F.H.W.S.	$\frac{1}{4}$ " - 20 x $\frac{3}{4}$ " F.H.M.S.
DOOR	2	No. 18 X 2- $\frac{1}{2}$ " F.H.W.S.	$\frac{5}{16}$ " - 18 x 1- $\frac{1}{2}$ " F.H.M.S.

ALWAYS REQUEST LATEST TEMPLATE DRAWINGS FOR NEW INSTALLATIONS

DO NOT SCALE DRAWINGS ALL DIMENSIONS ARE IN INCHES

1010 SERIES HOLDERS, 1020 SERIES STOPS, 1030 SERIES FRICTION CONCEALED MOUNTING REVERSIBLE/ NON-HANDED

SEE OTHER SIDE FOR INSTALLATION INSTRUCTIONS
SELECT PROPER DIMENSIONS FROM CHART BELOW
ALL DRILLING AND TAPPING TO BE DONE IN FIELD

DIMENSIONS BELOW- HOLD-OPEN FOR HOLDERS, OPENING FOR STOPS
ALL DIMENSIONS SHOWN IN INCHES
FOR DEAD STOP ADD 5/8" TO "A" DIMENSION

		85° H.O.					90° H.O.					95° H.O.					100° H.O.					105° H.O.					110° H.O.							
MODEL NO.	DOOR OPENING	A	B	C	E	A	B	C	E	A	B	C	E	A	B	C	E	A	B	C	E	A	B	C	E	A	B	C	E					
1011,1021 1031	27-29 1/8"	6 3/8	6 3/8	5 1/2	16 7/8	5 1/8	5 1/8	5	16 7/8	5 3/8	5 3/8	4 1/2	17 1/8	*5 1/8	*4 1/8	*2	19 5/8	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	18 3/8
1012,1022 1032	30-35 1/8"	7 3/8	7 3/8	6 3/4	18 5/8	6 15/16	6 15/16	6 1/4	18 3/8	6 1/2	6 1/2	5 3/4	18 7/8	6 3/8	6 3/8	5 1/2	18 3/8	5 1/8	5 1/8	3 13/16	19 3/4	*5 5/8	*5 5/8	*1	22 5/8	—	—	—	—	—	—	—	—	20 1/8
1013,1023 1033	36-39 1/8"	11 5/8	8 3/8	6 3/4	22 7/8	11 1/8	8	7 1/4	22 7/8	10 5/8	7 9/16	6 3/4	22 7/8	7 9/16	6 3/4	7 1/4	25 3/4	12 7/16	7 5/8	6	22 3/4	9 1/2	6 1/8	5	23 1/2	—	—	—	—	—	—	—	—	21 3/8
1014,1024 1034	40-43 1/8"	14 7/16	9 5/8	9	25 5/8	13 7/8	9 1/8	8 1/4	25 7/8	13 5/8	8 1/2	7 3/4	25 3/4	12 13/16	8	7 1/4	25 3/4	12 7/16	7 5/8	7	25 5/8	12 1/8	7 1/4	6 1/2	25 3/4	—	—	—	—	—	—	—	—	22 3/8
1015,1025 1035	44 - UP	17 5/16	10 1/16	10	28 5/8	16 5/8	10	9 1/4	28 5/8	16 1/8	9 7/16	8 3/4	28 5/8	15 1/2	8 7/8	8	28 13/16	15 1/8	8 7/16	7 3/4	28 5/8	14 1/8	8 1/8	7 1/4	28 3/4	—	—	—	—	—	—	—	—	23 1/8

* BUTT HUNG ONLY

"A", "B" AND "C" DIMENSIONS MEASURED FROM CENTER LINE OF PIVOT NOT EDGE OF DOOR

		85° H.O.					90° H.O.					95° H.O.					100° H.O.					105° H.O.					110° H.O.				
MODEL NO.	DOOR OPENING	A	B	C	E	A	B	C	E	A	B	C	E	A	B	C	E	A	B	C	E	A	B	C	E	A	B	C	E		
1011,1021 1031	30-32 1/8"	6 7/8	6 7/8	6 1/4	16 7/8	6 7/16	6 7/16	5 3/4	16 7/8	6 1/8	6 1/8	5 3/8	16 7/8	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	18 3/8	
1012,1022 1032	33-38 1/8"	8	8	7 1/4	18 7/8	7 1/2	7 1/2	6 3/4	18 7/8	7 1/8	6 1/2	6 1/2	18 5/8	6 1/8	6 1/8	6	18 3/8	6 3/8	6 3/8	5 3/4	18 5/8	6 3/8	6 3/8	5 1/2	18 5/8	—	—	—	—	20 1/8	
1013,1023 1033	39-42 1/8"	12 5/16	9 1/4	8 1/2	22 7/8	11 3/4	8 1/8	8	22 3/4	11 1/4	8 3/8	7 1/2	22 3/4	10 13/16	7 3/4	7 1/8	22 3/4	10 7/16	7 3/8	6 3/4	22 3/4	10 1/8	7 1/8	6 3/8	22 3/4	—	—	—	—	21 3/8	
1014,1024 1034	43-46 1/8"	15 1/4	10 7/16	9 3/4	25 3/4	14 9/16	9 3/4	9	25 3/4	14	9 3/8	8 1/2	25 3/4	13 3/8	8 3/4	8	25 3/4	13 1/8	8 5/8	7 1/2	25 3/4	12 3/4	7 9/16	7 1/4	25 3/4	—	—	—	—	22 3/8	
1015,1025 1035	47-UP	18 1/8	11 1/2	10 3/4	28 3/4	17 3/8	10 3/4	10	28 3/4	16 3/4	10 1/8	9 1/2	28 5/8	16 1/4	9 5/8	9	28 5/8	15 3/4	9 1/2	8 1/2	28 5/8	15 1/4	8 1/2	8	28 5/8	—	—	—	—	23 1/8	

1000-2-06.DWG

www.abhmf.com

E-mail: abhinfo@abhmf.com

Architectural Builders Hardware Mfg., Inc.

1222 Ardmore Ave., Itasca, IL 60143

630.875.9900; FAX 800.9FAXABH (932.9224)

© 2012 ABH Mfg., Inc.
Printed in USA

REVISED 04-23-12

1000

